



Advertising Barrier Gate AK-D206

Parameters:


Power supply	220V±10%/50HZ,60HZ
Motor power	DC24V,150W
Temperature	-30~80℃
LED strip power supply	DC12V, 14A
LED screen power supply	DC5V, 40A
Advertising LED Screen Dimension	1488x409mm
Advertising LED Box Dimension	440*920mm
Remote Control Distance	<=30m
Opening and Closing Time	3s~6s
Boom Length	Fixed length 2.7m, extended boom length 130-700mm adjustable
Housing Dimension	450*331*1180mm

Features:


- Direction and speed are adjustable.
- Advertising barrier's house is durable and water-proof, so it can be used outdoor.
- Adopt Photosensitive sensor control to control LED light, more intelligent.
- Adopt multiple protective measures (like anti-wind, preventing motor overheat, Anti-surge, Thunder-proof and so on), which increase barrier's safety and reliability.
- Multiplex control way is provided for user: push button, remote controller, long range reader etc.
- Add loop sensor, following functions can be realized: auto close, auto bounce up etc. It can automatically close gate and perfect preventing smashing car.
- Opening first function, it can highly increase access rate.
- System adopts standard electric interface which can connect with other system

easily.

Housing Dimension

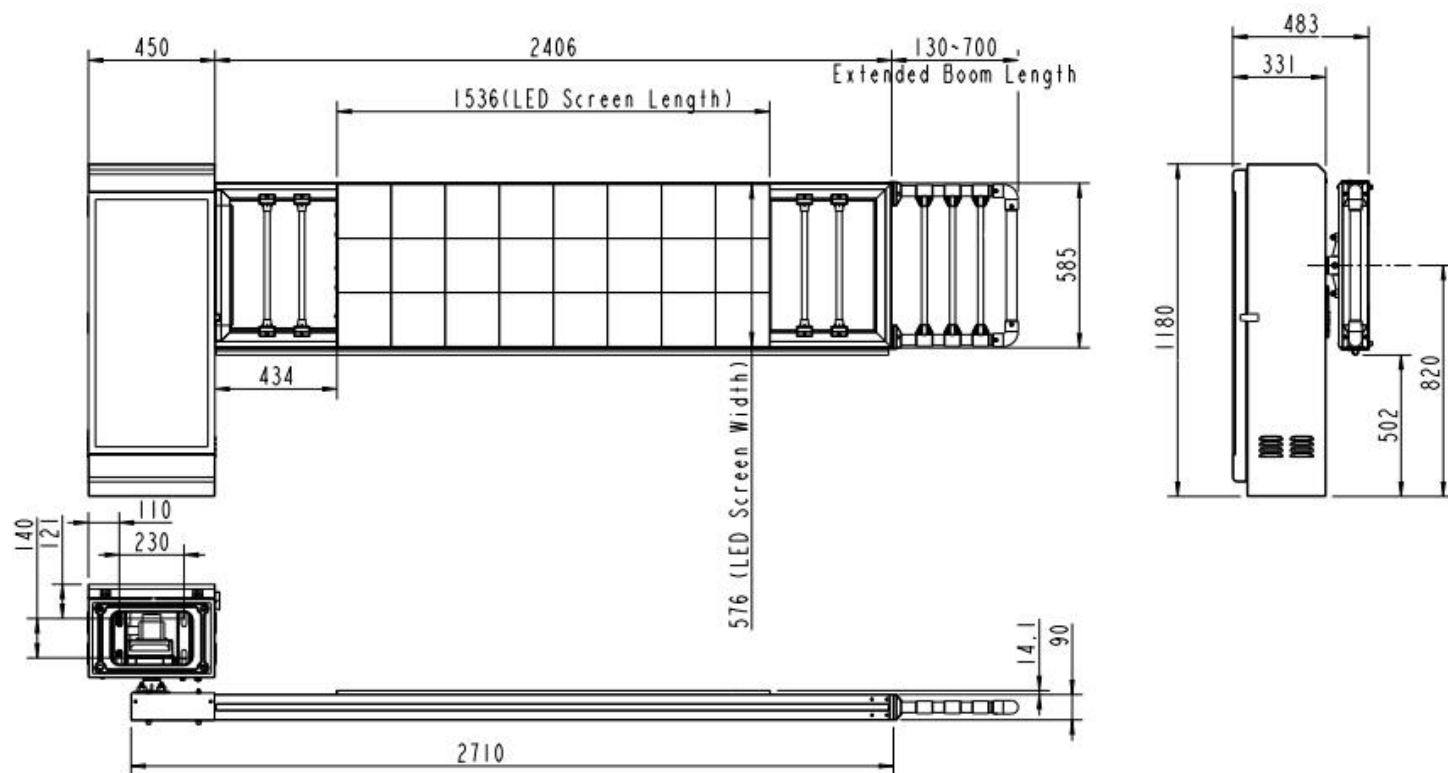

Barrier Direction:

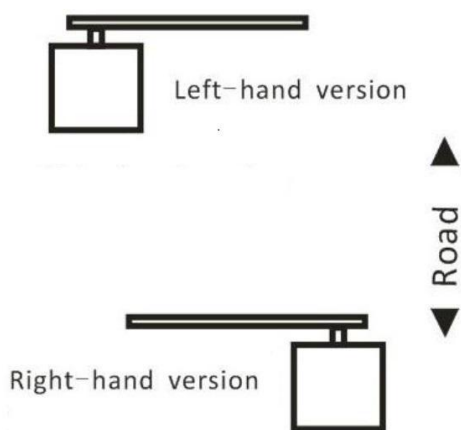

Machine core structure:

